



VECTOR 15.

SE TROUVE DANS CES COULEURS:



NOIR NUIT (BRILLANT)



VERT URBAIN (BRILLANT)



ROUGE FONCÉ MÉTALLISÉ (BRILLANT)




BLEU (BRILLANT)

SPÉCIFICATIONS ET OPTIONS

CADRE	Orbea Urban Speed, Aluminium 6000, Orbea Tube Shaping, Flat Mount Disc Brake, 135x9 QR, Carrier and Mudguard compatible, max 700x40C, Inner Cable routing,
FOURCHE	Speed 400mm Alloy Flat mount
PLATEAU DE PEDALIER	Orbea Alloy 32x48t
	Shimano Sora 30x39x50
DIRECTION	VP-Z104PD 1-1/8" Semi-Cartridge
CINTRE	Alloy 31.8mm Riser 640mm
POTENCE	Alloy 31.8mm interface 7°
MANETTES	Shimano Sora
FREINS	Shimano MT200 Hydraulic Disc
PIGNON	Shimano HG400 11-34t 9-Speed
DERAILLEUR ARRIÈRE	Shimano Sora 3000GS
DERAILLEUR AVANT	Shimano Sora 3000
CHAÎNE	Shimano HG53 9-Speed
ROUES	Orbea Airline Corsa Disc 700X19c
PNEUS	Kenda K1098 700x32 Reflective Tape
	Kenda K1098 700x28C Reflective type + Puncture protection
TIGE SELLE	Alloy 27.2 Offset 0
SELLE	Selle Royal Asphalt GR
PORTE-BAGAGE ARRIÈRE	Orbea rear luggage carrier (Max:18Kg)
GARDE-BOUE	SKS EDGE Alloy C46R
ÉCLAIRAGE AVANT	Joss Spanninga Kendo XDAS Dinamo
ÉCLAIRAGE ARRIÈRE	Spanninga Pixeo
DYNAMO	Shimano DH-3D37-NT, 6V Dynamo 3.0W
BÉQUILLE	Ursus Mooi rear adjustable

GÉOMÉTRIE

TAILLE	XS	S	M	L	XL
1 - SEAT_TUBE	430	480	525	555	580
2 - TOP_TUBE	521	546	559	580	601
3 - HEAD_TUBE	109	127	150	170	200
4 - CHAIN_STAY			435		
5 - BB_HEIGHT	281	281	283	283	285
6 - BB_DROP	70	70	68	68	66
7 - WHEELBASE	1021	1037	1052	1063	1075
8 - HEAD_ANGLE	71	71	71	71.5	72
9 - SEAT_ANGLE	75	74	74	73.5	73
10 - STANDOVER	738	768	800	824	852
11 - REACH	378	388	395	405	410
12 - STACK	535	552	571	592	625
13 - FORK_LENGTH			400		
14 - OFFSET			51		

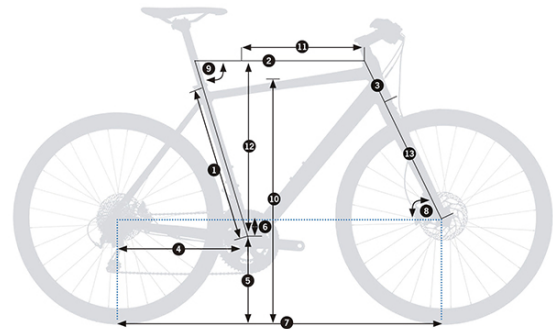

ERGONOMIE

TAILLE	BIELLE	POTENCE	CINTRE
47	170	90	400
49	170	100	400
51	170	100	420
53	172.5	110	420
55	172.5	110	420
57	172.5	110	440
60	175	120	440
XS	170	90	640
S	170	90	640
M	170	90	640
L	170	90	640
XL	170	90	640

* La dimension du guidon est centre-centre